

*A Quality Product from Hawkeye Industries, Inc.*

## Duratec® SunShield Clear Polyester Topcoat



***Duratec SunShield Clear Polyester Topcoat represents a breakthrough in polyester clear coat technology. The topcoat resists yellowing in sunlight; no sun blocking urethane is required for exterior use. The topcoat provides a high quality finish with good chemical resistance. This product has been specially formulated to be easy to sand and polish.***

### **Features**

Here's why you should use Duratec SunShield Clear Polyester Topcoat:

**UV Resistance**—resists yellowing when exposed to sunlight.

### **Features** *(cont)*

**Application**—easy to apply and sand.

**Air-cure**—no wax required.

**Pre-promoted**—for safety, consistency and easy use.

**High Build**—up to 18 wet mils, excellent pore filling.

**High Gloss**—polishes to a high gloss, —wet look surface.


**Chemical Resistance**—highly cross-linked coating provides excellent chemical resistance.

**Strength and Flexibility**—excellent flexibility and impact resistance.

### **Performance Benefits**

- Easy to apply
- Easy to finish
- High gloss finish
- Saves a step with only one product application needed, no urethane required.

## SunShield Topcoat 904-061

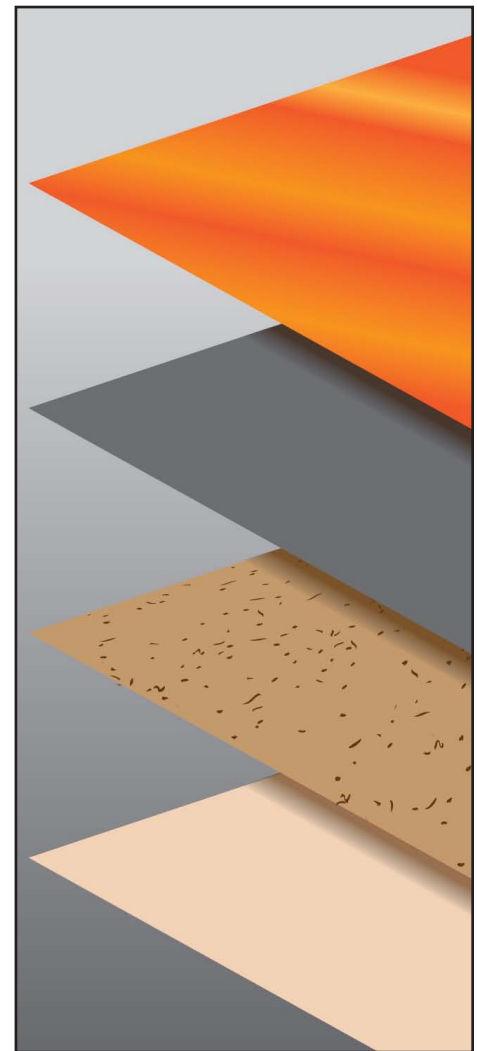

### **Hawkeye Industries**

P. O. Box 415, Bloomington, CA 92316  
(USA) 800-977-0060 • (Outside USA) 909-546-1160 • Fax 909-546-1161  
Email: hawkeyesales@hawkeyeind.com • www.duratec1.com

Limited/ warranty statement: Our products are intended for sale to industrial and commercial customers. We request that customers inspect and test our products before use and satisfy themselves as to contents and suitability. Nothing herein shall constitute a warranty, expressed or implied, including any warranty of merchantability or fitness, nor is protection from any law or patent to be inferred. All patent rights are reserved. The exclusive remedy for all proven claims is replacement of our materials and in no event shall we be liable for special, incidental or consequential damages.



Product No. 904-061

Data Sheet  
Continued

Duratec® SunShield Clear Polyester Topcoat

Page: 2

**TYPICAL PRODUCT PROPERTIES**

Gel time @77F, 2% MEKP .....	15-18 minutes
Viscosity @ 77F, 20RPM, #2 spindle, Brookfield RVF .....	540-680 cps
Thixotropic Index (2RPM/20RPM) .....	minimum 3.0
Weight per gallon .....	8.85 lbs/gal
Coverage per gallon, 10mil thickness .....	110-115ft <sup>2</sup>
Maximum VOC .....	362 g/l
VOC in use .....	< 232 g/l *1

\*1 Note: based on calculations using the UEF table to determine styrene emissions. Local regulations vary. Consult your local AQMD to confirm actual VOC in use.

Duratec Sunshield Clear Polyester Topcoat is among the many Duratec products distributed worldwide by Hawkeye Industries.



**Hawkeye Industries**

P. O. Box 415, Bloomington, CA 92316  
(USA) 800-977-0060 • (Outside USA) 909-546-1160 • Fax 909-546-1161  
Email: hawkeyesales@hawkeyeind.com • www.duratec1.com

Our Products are intended for sale to industrial and commercial customers. We request that Customers inspect and test our products before use and satisfy themselves as to contents and suitability. Nothing herein shall constitute a warranty, expressed or implied, including any warranty or merchantability or fitness, nor is protection from any law of patent to be inferred. All patent rights are reserved. The exclusive remedy for all proven claims is replacement of our materials and in no event shall we be liable for special, incidental or consequential damages